




INSTALLATION DRAWING

ACO Polycrete Pty Ltd
1300 765 226
sales@acoaus.com.au

DRG #: IY005
www.acopassavant.com.au
www.acopassavant.co.nz

CLASS D (AS 3996) WITH CONCRETE COLLAR TO SUIT ENGINEERED ASPHALT PAVEMENTS

ACO Limited
0800 448 080
sales@aonz.co.nz

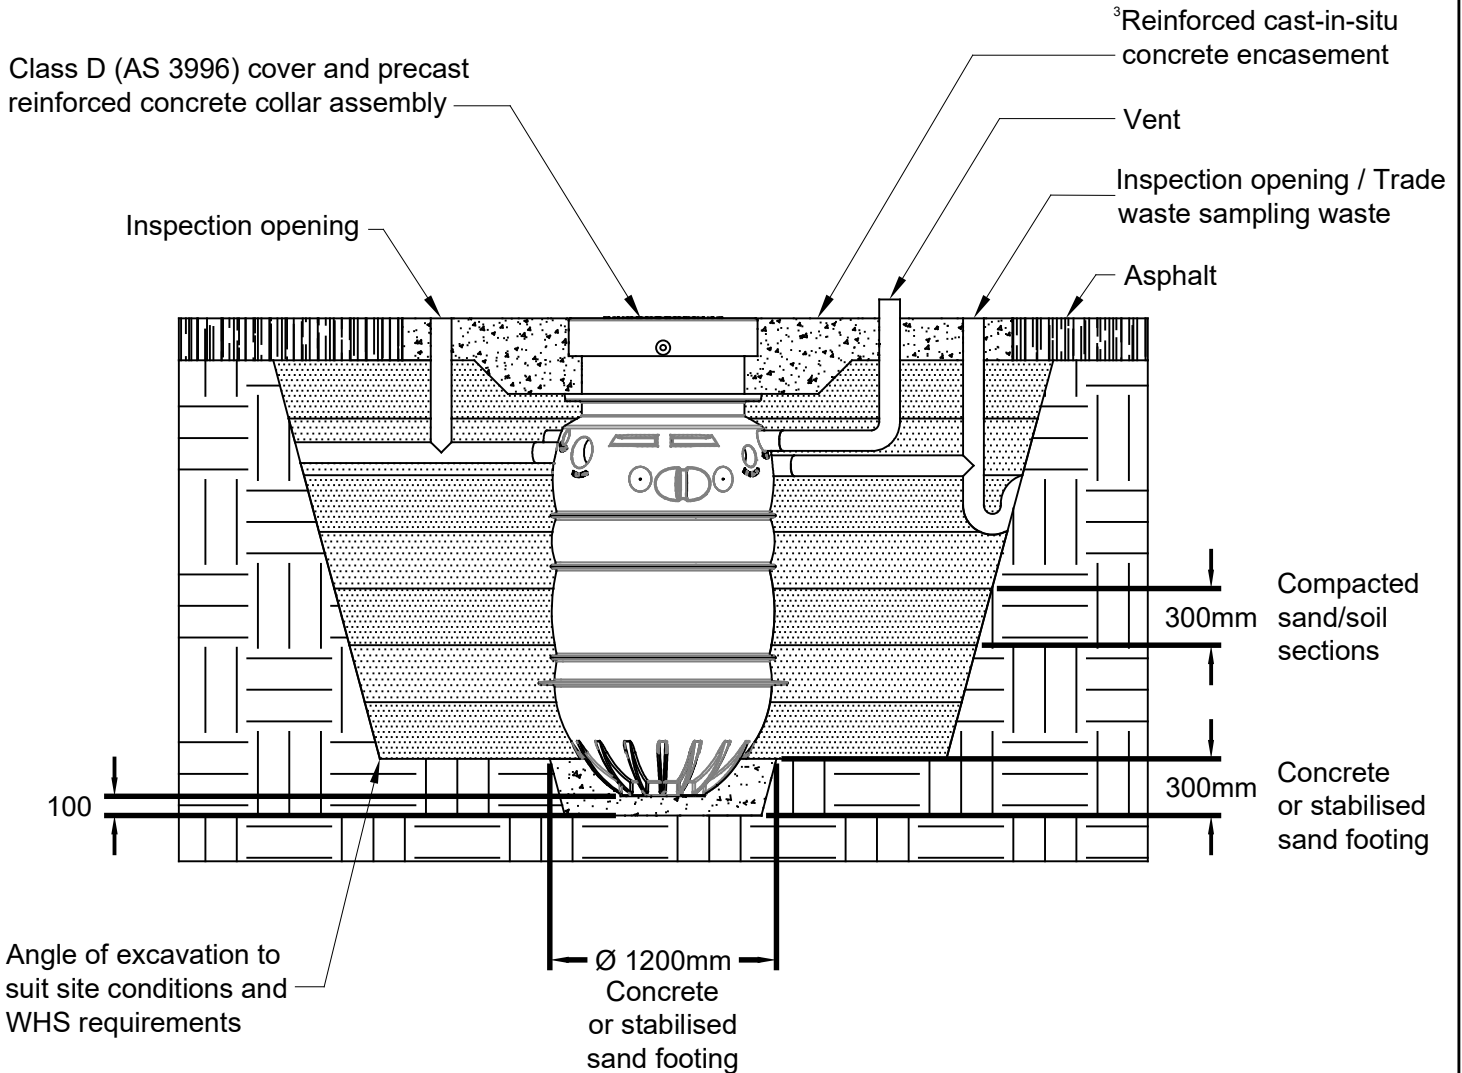

NOTES:

1. Lipumax-P pictured.
2. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.
3. Reinforced cast-in-situ concrete rebate to support and encase the precast collar assembly.

Specification Clause

For engineered asphalt pavements, the grease separator shall be ACO Passavant, Lipumax below ground grease separator. The grease separator shall be supplied with a Rhinocast Class D 210 kN (AS 3996) cover and precast reinforced concrete collar, (part number 142099) and installed in a reinforced cast-in-situ concrete encasement.

Grease separator shall be supplied and manufactured by ACO Polycrete and installed in accordance with local codes and Standards.

The grease separator shall be manufactured in accordance with EN 1825 from polyethylene. The design shall feature a rib-structure to key into concrete and manufactured in one piece. The effluent quality must comply with EN 1825.