




INSTALLATION DRAWING

ACO Pty Ltd
1300 765 226
sales@acoaus.com.au

DRG #: IY001

LIPUMAX-P CLASS B (AS 3996) WITH ACCESS COVER
AND REINFORCED CONCRETE COLLAR

ACO Limited
0800 448 080
sales@aonz.co.nz

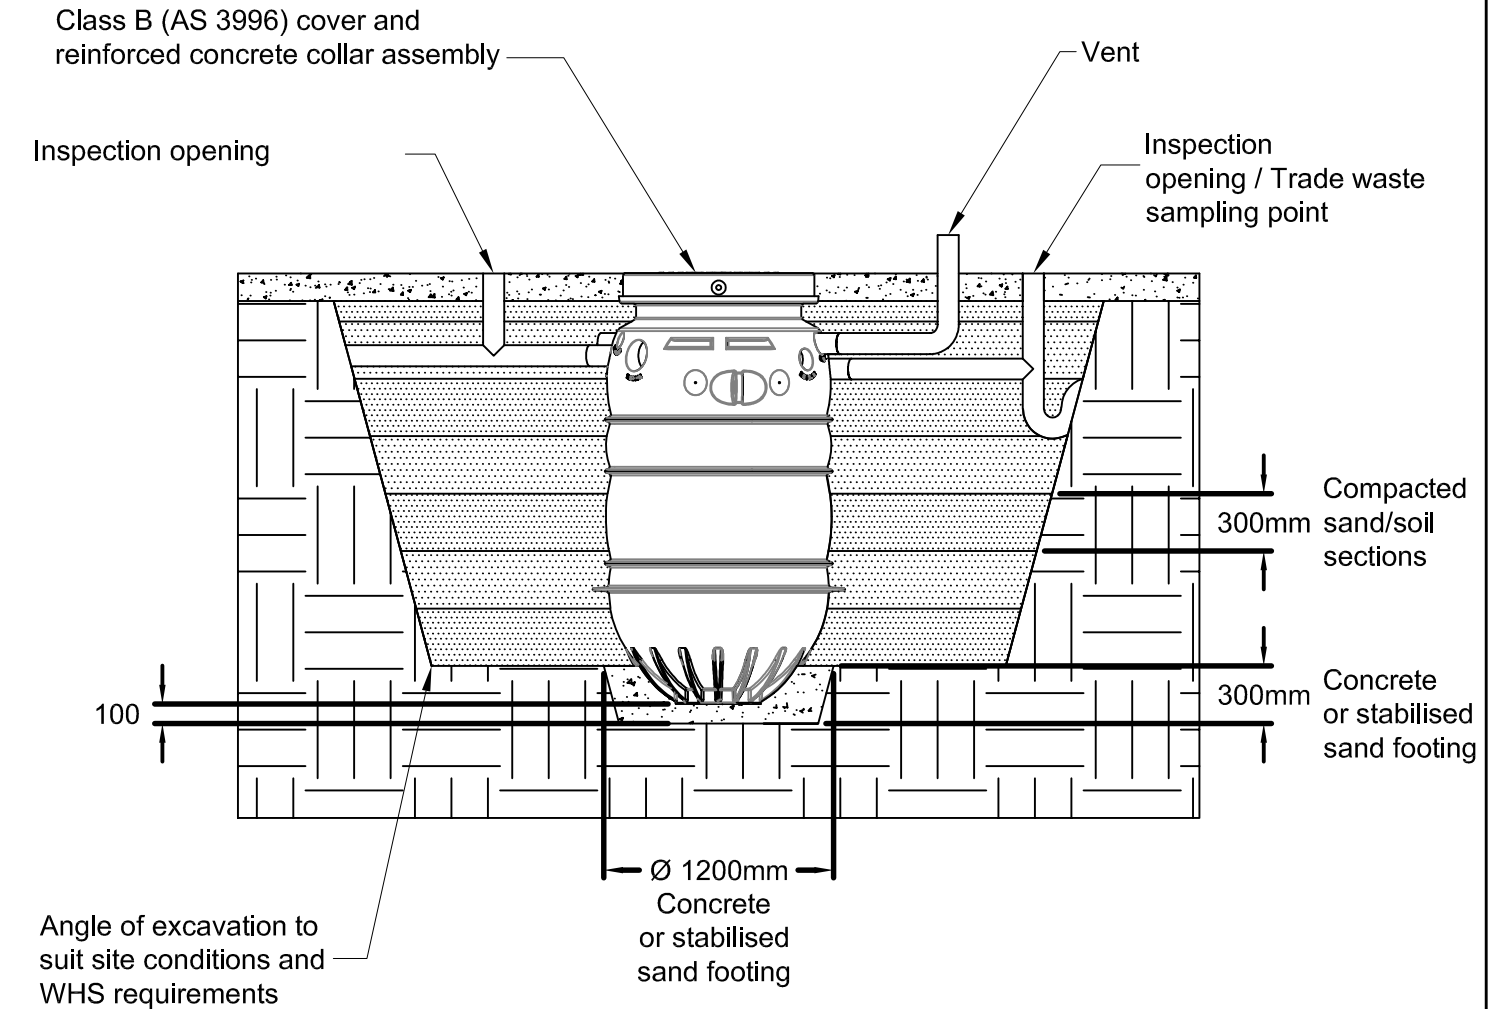

NOTES:

1. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.

Specification Clause

Grease separator shall be ACO Passavant, Lipumax-P below ground grease separator. The grease separator shall be supplied with a SAKU® Class B 80kN (AS 3996) cover and collar, part number 142119 / Rhinocast® Class B 80 kN (AS 3996) cover and collar, part number 142120*. The grease separator shall be supplied and manufactured by ACO and installed in accordance with local codes and Standards.

The grease separator shall be manufactured in accordance with EN 1825 from polyethylene. The design shall feature a rib-structure to key into concrete and manufactured in one piece. The effluent quality must comply with EN 1825.

*Delete one