



# INSTALLATION DRAWING

ACO Pty Ltd  
1300 765 226  
sales@acoaus.com.au

DRG #: IY011

LIPUMAX-G CLASS B (AS 3996) WITH ACCESS COVER AND REINFORCED CONCRETE COLLAR

ACO Limited  
0800 448 080  
sales@aconz.co.nz


www.acopassavant.com.au  
www.acopassavant.co.nz

Class D (AS 3996) cover and reinforced concrete collar assembly

Inspection opening

Vent

Inspection opening/Trade waste sampling point

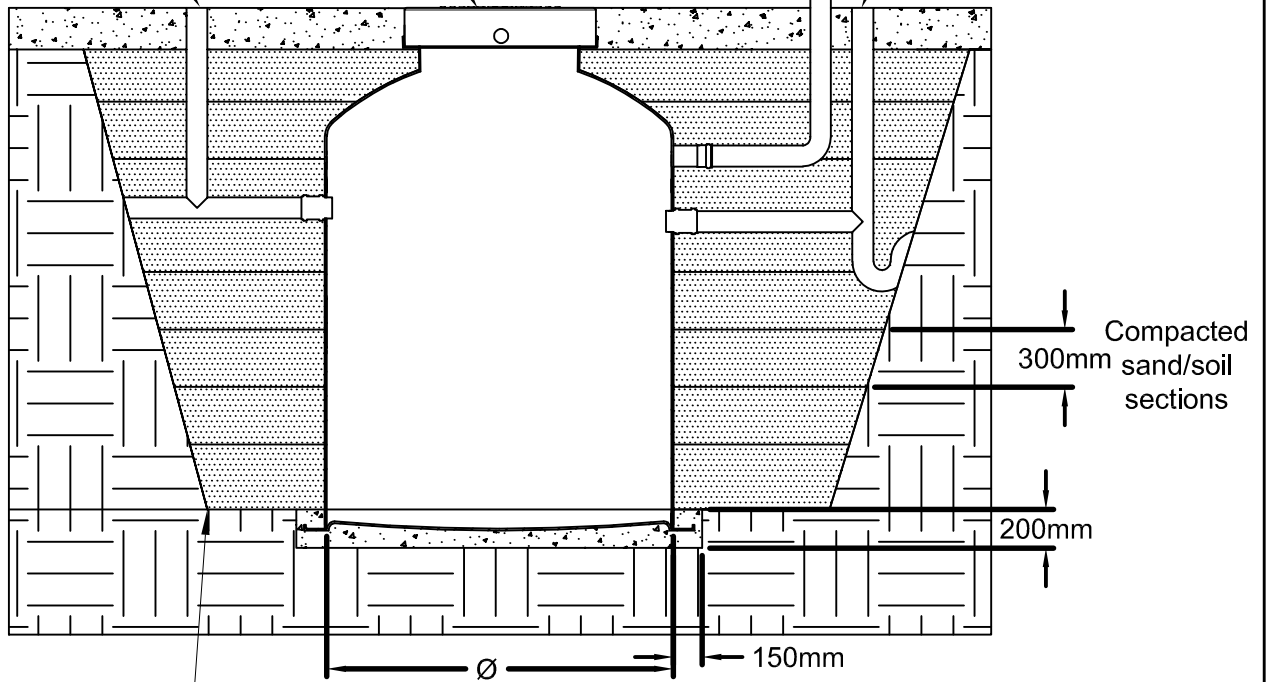

Compacted sand/soil sections  
300mm  
200mm

150mm

Angle of excavation to suit site conditions and WHS requirements

Description	Ø
Lipumax-G 3000L	2340
Lipumax-G 4000L	2340
Lipumax-G 5000L	2740

## NOTES:

1. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.

## Specification Clause

Grease separator shall be ACO Passavant, Lipumax-G below ground grease separator. The grease separator shall be supplied with a SAKU® Class B 80kN (AS 3996) cover and collar, part number 142119 / Rhinocast® Class B 80 kN (AS 3996) cover and collar, part number 142120\*. The grease separator shall be supplied and manufactured by ACO and installed in accordance with local codes and Standards.

\*Delete one