



INSTALLATION DRAWING

ACO Pty Ltd
1300 765 226
sales@acoaus.com.au

DRG #: IY012

LIPUMAX-G CLASS D (AS 3996) WITH CONCRETE COLLAR,
AND DISTRIBUTED PLATE AND RISER TUBE

ACO Limited
0800 448 080
sales@aconz.co.nz

Class D (AS 3996) cover and reinforced concrete collar assembly


Load distribution plate

Vent

Inspection opening

Inspection opening/Trade waste sampling point

Riser Tube

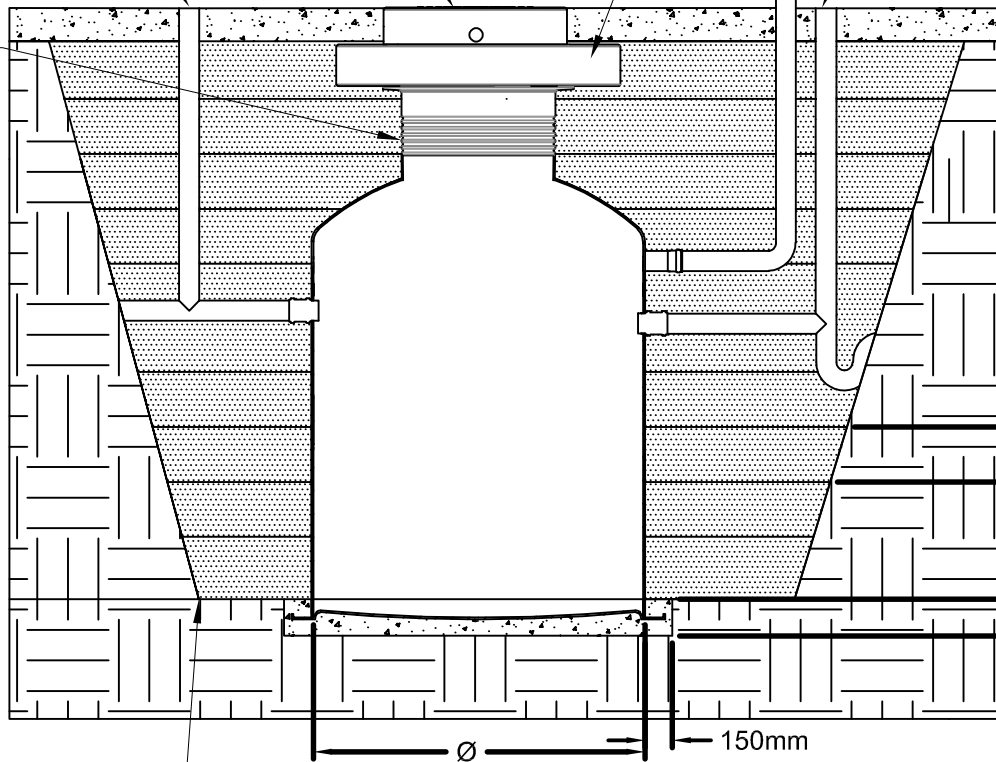

Compacted sand/soil sections

300mm

200mm

150mm

Ø

Angle of excavation to suit site conditions and WHS requirements

Description	Ø
Lipumax-G 3000L	2340
Lipumax-G 4000L	2340
Lipumax-G 5000L	2740

NOTES:

1. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.

Specification Clause

For non-structural or poor bearing pavements, the grease separator shall be ACO Passavant, Lipumax-G below ground grease separator. The grease separator shall be supplied with a Rhinocast® Class D 210 kN (AS 3996) cover, reinforced concrete collar and load distribution plate, part number 142299.

Grease separator shall be supplied and manufactured by ACO and installed in accordance with local codes and Standards.