




# INSTALLATION DRAWING

ACO Pty Ltd  
1300 765 226  
sales@acoaus.com.au

DRG #: IY016

LIPUMAX-G CLASS D (AS 3996) WITH CONCRETE COLLAR  
TO SUIT ENGINEERED BRICK PAVEMENT


ACO Limited  
0800 448 080  
sales@aconz.co.nz

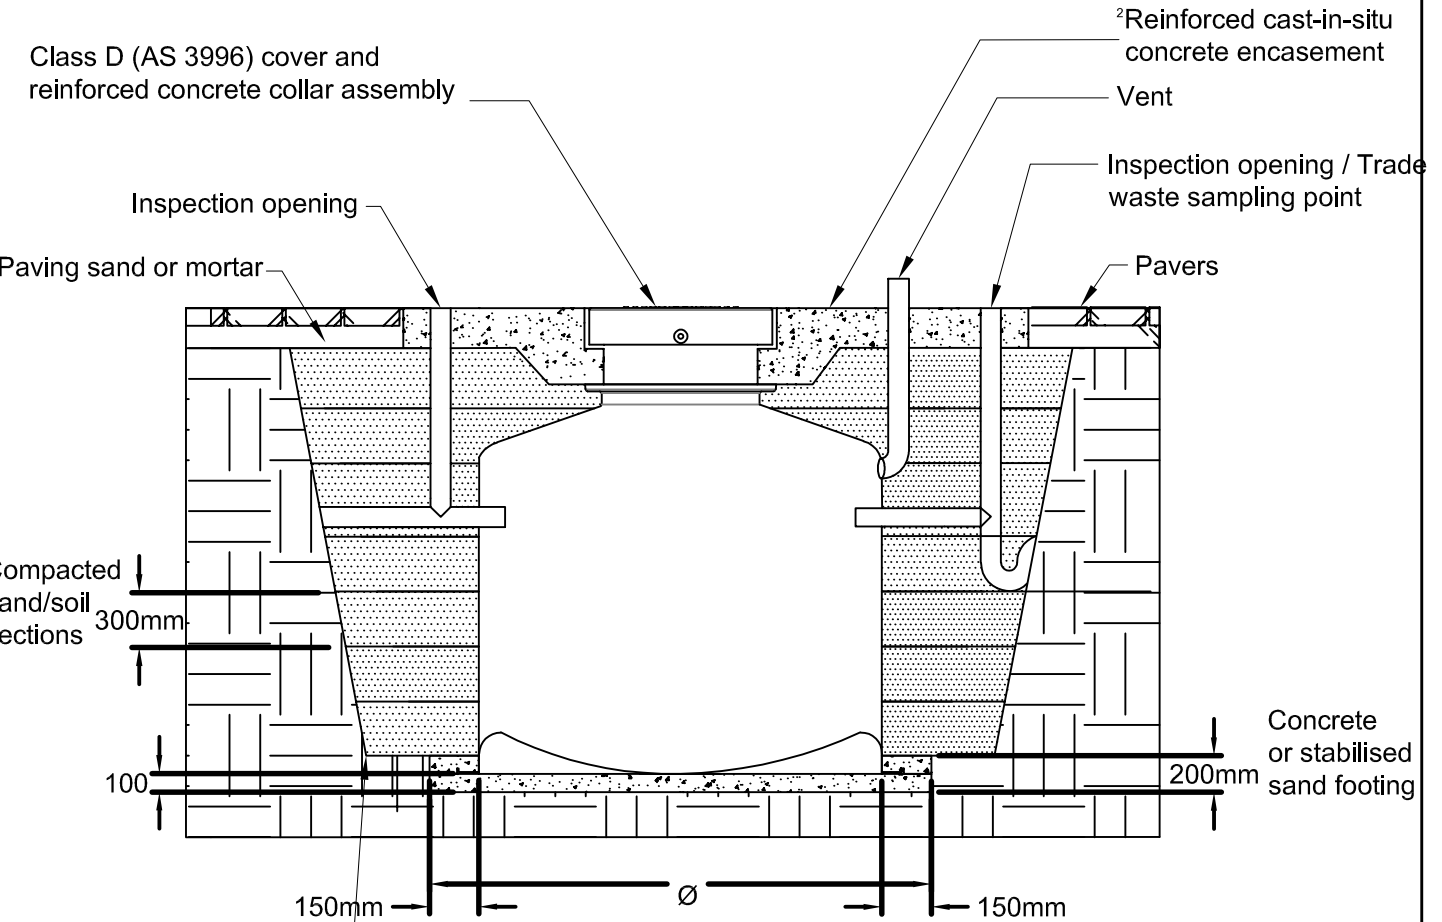

Description	Ø
Lipumax-G 3000L	2340
Lipumax-G 4000L	2340
Lipumax-G 5000L	2740

15mm high strength non-compressible grout

15mm epoxy sealant

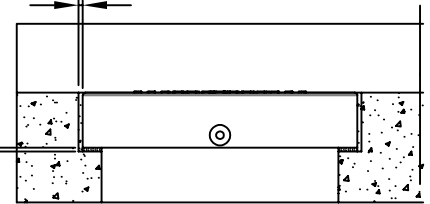

Rebate detail

## NOTES:

1. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.
2. Reinforced cast-in-situ concrete rebate to support and encase the precast collar assembly.

## Specification Clause

For adequately reinforced concrete slabs, the grease separator shall be ACO Passavant, Lipumax-G below ground grease separator. The grease separator shall be supplied with a Rhinocast® Class D 210 kN (AS 3996) cover and reinforced concrete collar, part number 142099, riser tube, part number 142350, and installed in an engineered slab detail.

Grease separator shall be supplied and manufactured by ACO and installed in accordance with local codes and Standards.